

Overview

- Dimmable constant voltage
- Active power factor correction
- Compliant to IEC623860-101,102,207
- 2-100% Dimming range
- Nominal life 50,000 hours
- 5-year guarantee
- Australia/New Zealand Certification



Ordering Information

Part Number:

HDL-CV-150-24-HPF



Electrical

Input:

- 240V, 50Hz
- Power Factor >0.95 @ full load
- Flex: 1M 0.75mm² 3 core c/w plugtop
- THD: <15%
- Dielectric strength: 3000V
- Inrush current: tba
- Earth leakage current: tba
- MCB B curve: (6A, 10A, 16A) tba
- MCB C curve: (6A, 10A, 16A) tba

Electrical

Output:

- 150W, 24V, 6250mA
- Flex: 0.2M 1.5 mm² 2 core
- ≥ 90% efficiency @ full load
- 2-100% dimming range

Mechanical


- Extruded aluminium housing
- Epoxy Potted
- Dimensions (mm): 240 x 69 x 40
- Weight (grammes): 1100

PRODUCT DATASHEET

IP67 DALI Outdoor Series

150W 24V CONSTANT VOLTAGE HPF

Line Drawing

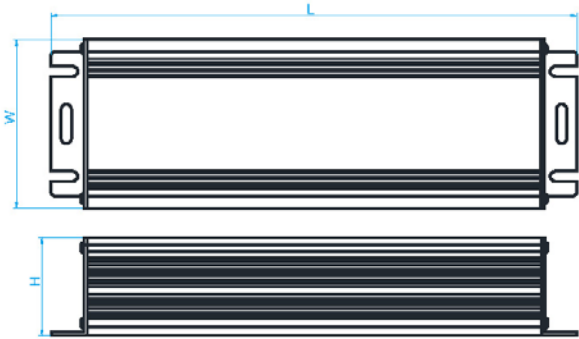

Protection

- Class II
- IP67 protection rating
- Fully isolated (input/output)
- Short circuit with auto reset
- Over-voltage with auto reset
- Over-temperature with auto reset

Wiring Diagram

100-240V/AC



Thermal

- Ta rating -30°C to +45°C

Safety

RCM Mark applied