

**Overview**

- Dimmable constant voltage
- Active power factor correction
- Compliant to IEC623860-101,102,207
- 2-100% Dimming range
- Nominal life 50,000 hours
- 5-year guarantee
- Australia/New Zealand Certification



**Ordering Information**

**Part Number:**

**HDL-CV-60-12-HPF**



**Electrical**

Input:

- 240V, 50Hz
- Power Factor >0.95 @ full load
- Flex: 1M 3 core c/w plug top (option)
- THD: <20%
- Dielectric strength: 3750V
- Inrush current: tba
- Earth leakage current: tba
- MCB B curve: (6A, 10A, 16A) tba
- MCB C curve: (6A, 10A, 16A) tba

**Electrical**


Output:

- 60W, 12V, 5000mA
- ≥ 85% efficiency @ full load
- 2-100% dimming range
- Screw terminals
- Wire size (mm): 0.5 to 3.0
- Screw torque (Nm): 0.45

**Mechanical**

- Polycarbonate UL94-VO
- (rated for low smoke and halogen free)
- Dimensions (mm): 170 x 50 x 29
- Weight (grammes): 250


#### Line Drawing

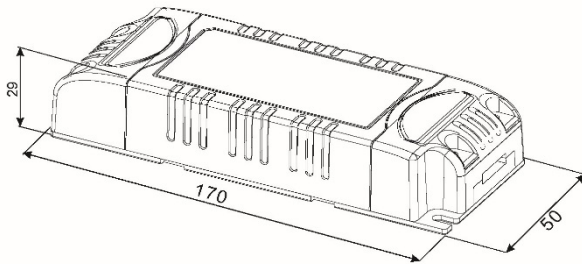

#### Protection

- Class II
- IP20 protection rating
- Fully isolated (input/output)
- Short circuit with auto reset
- Over-voltage with auto reset
- Over-temperature with auto reset

#### Wiring Diagram

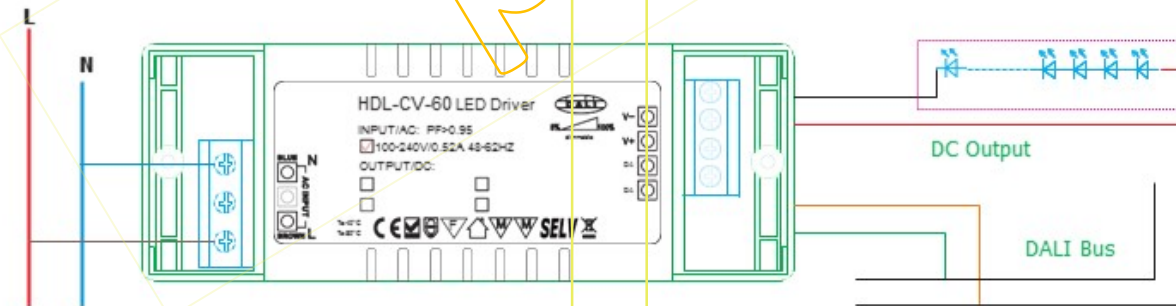

#### Thermal

- Ta rating -30°C to +45°C

#### Safety:

- RCM Mark applied